



# Check-List

To mount your flat panel monitor or any parts at an ergonomically correct position, start at step 1 and continue as directed.


## Part Check-List

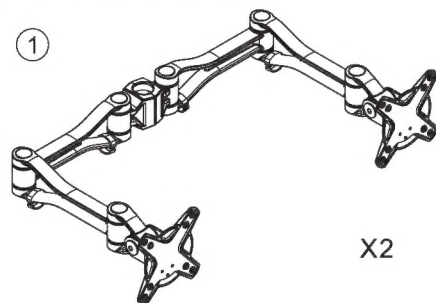


## Fitting / Tools Check-List

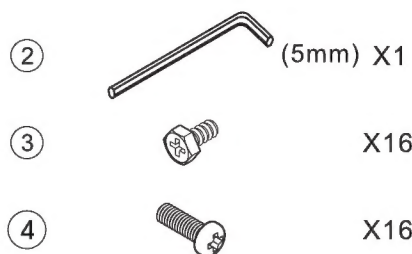

## Part Check-List

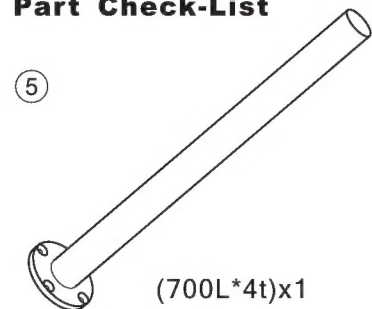


## Fitting / Tools Check-List

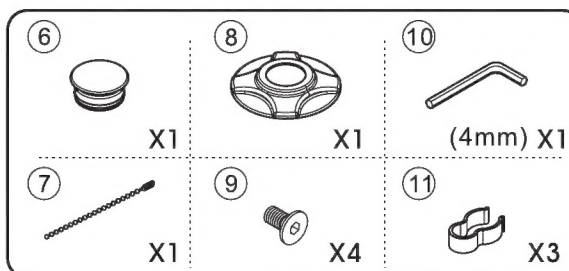

## Step 1


Secure the cranking unit to the bracket with at least four screws. The use of screws and screws position depends thickness of desk. Fully secure screws with allenkey (5mm) provided.

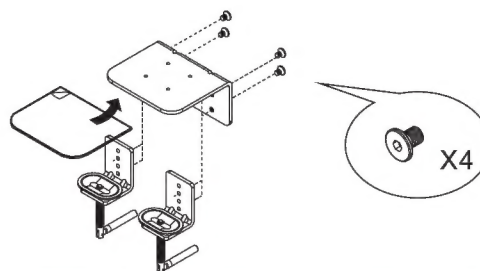

# Assembly Guide

## Step 2

Fix the clamp on the desk. Use 4mm Allen key to secure the pole & clamp with 4 screws. For desks 15-85 mm thick, over 30 mm is suggested.

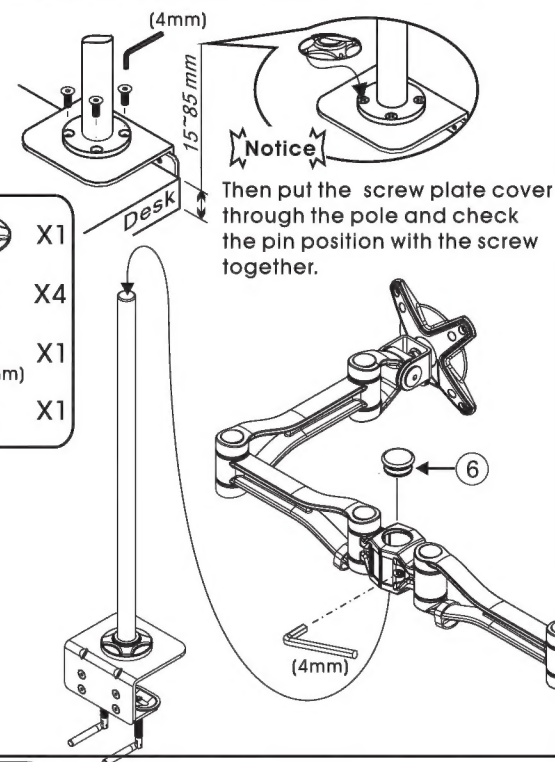


## Step 3

Loosen two screws slightly. with 4mm Allen key Put the arm into the post and adjust it to the suitable position. Tighten it up. Finally, put in the plug.




## Step 4

(1) Please loosen the knob at first, and then apart the fixing lump.





(2) Then, take VESA up .



## Step 5

Place LCD with facing downward on flat surface. Place VESA on the LCD back as figure and align to the screw holes. Secure them together with four screws .And then tighten them up with screwdriver(not provided).


•These screws (M4/15L) are just for special monitor when the original screws are too short to fasten.

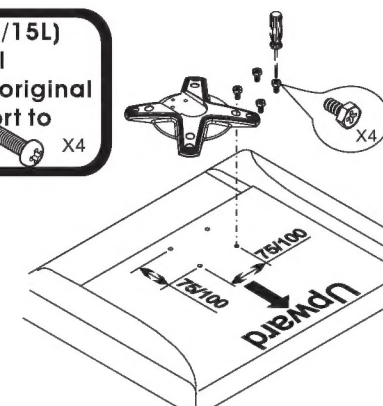

# Assembly Guide


## Step 6

Insert the VESA(with LCD display on already)into the arm and press it down.  
Then secure fixing lump on VESA with knob.(as figure down step 1. 2. 3)

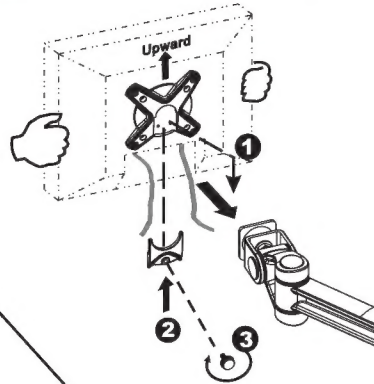


## Step 7

cable management  
arrange cable on pole as  
required.



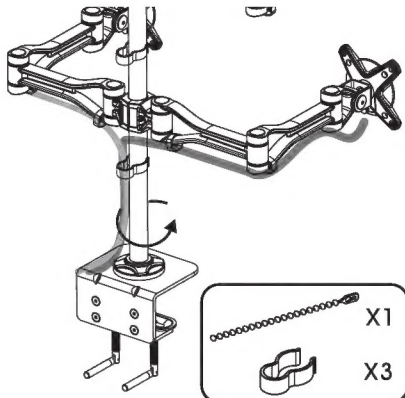


## Step 8

If the arm is loose, please use the  
Allen Key(5mm) to tighten the screw.

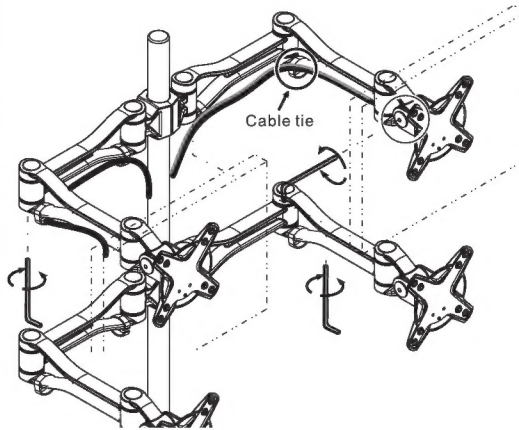


## Cautions:

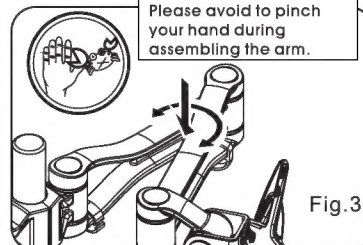

Please avoid to pinch  
your hand during  
assembling the arm.

# NewStar user's Manual

## LCD Monitor Arm FPMA-D1030D4

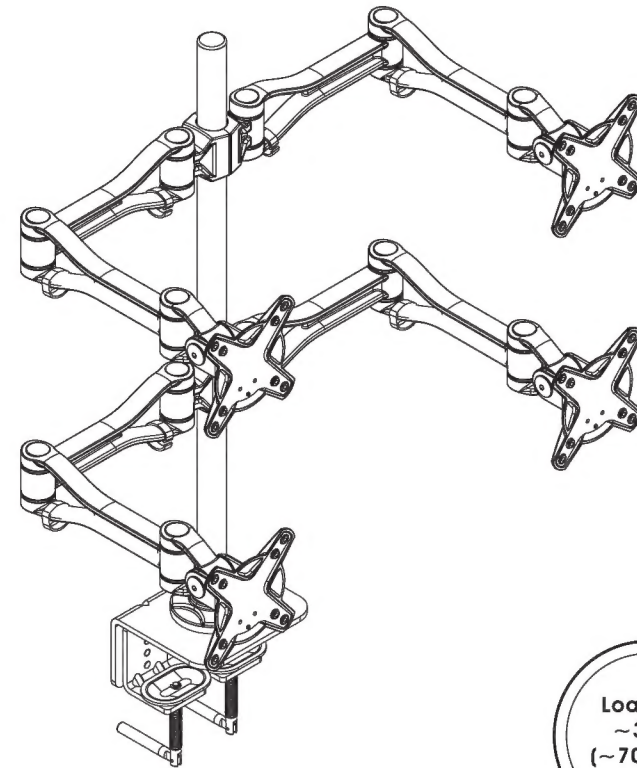

Loading:  
~32kg  
(~70.4 lbs)

**NEWSTAR**  
computerproducts

[www.NewStar.nl](http://www.NewStar.nl)  
Phone: + 31 (0) 23 547 88 88